

Alarm indicator Slave

Item numbers covered by this datasheet:

406123 - DK text: BRAND Forlad rummet
 406124 - DK text: BRAND Adgang forbudt
 406125 - UK text: FIRE
 406136 - RO text: Acces interzis
 406137 - RO text: Evacuare
 406142 - CZ text: Požár Opusite prostor
 406143 - CZ text: Požár Nevstupujte
 406146 - DK text: BRAND Adgang forbudt- Lindpro logo
 406147 - DK text: BRAND Forlad rummet - Lindpro logo
 406152 - DK text: BRAND Adgang forbudt- Bravida logo
 406153 - DK text: BRAND Forlad rummet - Bravida logo
 06162 - DK text: BRAND Adgang forbudt- Coromatic logo
 406163 - DK text: BRAND Forlad rummet - Coromatic logo
 406225 - DK text: BRAND Forlad rummet - Falck logo
 406226 - DK text: BRAND Adgang forbudt- Falck logo
 406253 - DK text: BRAND Forlad rummet - Lotek logo
 406254 - DK text: BRAND Adgang forbudt- Lotek logo
 526265 - F+UK text: Evacuation immediate, Evacuate immediately - Tyco
 526266 - F+UK text: Entree interdite, Emission Inergen, No entry, Inergen release - Tyco



Specifications

Power (activated): 12VDC/43mA 24VDC/41mA
 Rated voltage 9-30VDC
 Stand-by current <1mA
 Sound level min. 80 dB/1m @24V
 Ingress protection: IP22
 Colour: Gray, RAL 7032
 Cable limitation: 0.5 - 2.5 mm²
 HxLxD/Weight/Material: 80x120x38 mm / 0.11 kg / ABS

- 1) Connection to control panel F112/MasterTableau, 2 x EOL resistor 4K7 ohm
 - 2) Connection to control panel Sigma XT, EOL resistor 10K ohm
 - 3) Connection to control panel where the 'Light' signal is short to the 'Sound'.
- (Insert a diode (eg. 1N4001) between 'SOUND' and 'LIGHT' to prevent leakage current for the monitoring circuit).

Fig. 1

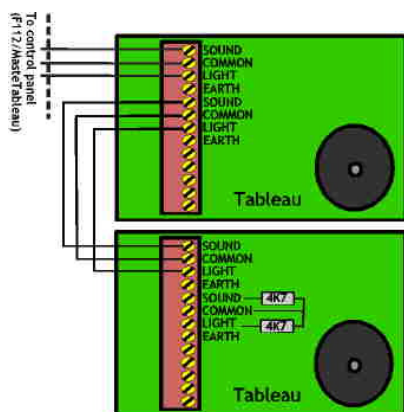


Fig. 2


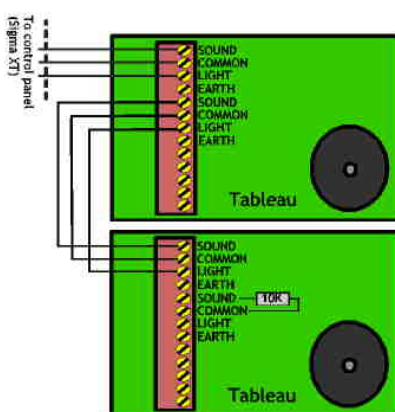


Fig. 3

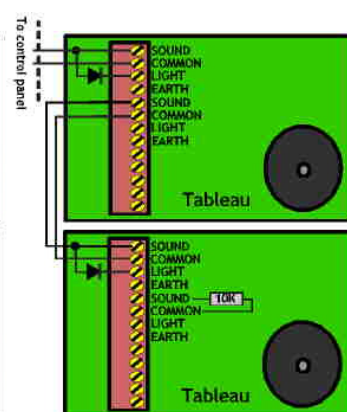

Document:

INTEC_Tableau Slave.doc

CATEGORY:

Electrical comp.

Id: MRP

Rev: 02.02.15



FIRE EATER

Vølundsvej 17
 DK- 3400 Hillerød
 Tel +45 7022 2769
 Fax +45 7023 2769

Text

1

2

3

4

5

6

7

8

9