

Control panel LFE

General

The control panel LFE is used to disconnect the power to deep fat fryer system or/and to control the activation of fire damper. There are four available relays (volt free changeover contact).

The unit can be supplied with Danish and English texts.

Facilities

- Indication of power
- Acoustic alarm
- Silencing of the acoustic alarm
- Indication for the silenced acoustic alarm
- Switching between NO (Normally open) and NC (Normally closed)
- Indication for NO (Normally open) Green
- Indication for NC (Normally closed) Red
- Disabling of the relay function
- Indication for the disabled relay function



Technical specifications

Power	230 V ac +/- 10% 50 Hz 24V DC +/- 10%
Power consumption	
Normal/Alarm	0.5W max./3.2W max.
Relay	230 V ac/5A – 24V DC/3A
Operation temperature	0 °C – 80 °C
Screws terminal	M3
Cable	< 2.5 mm ²
H×L×D:	110x270x220mm
Weight:	1.3 kg
Material:	ABS
Ingress protection:	IP65

Document: 52623# LFE
controlpanel.doc

Product:

LFE Control unit

Id: KP

Rev: 23.05.08

Text




FIRE EATER 1/2

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Installation

Always disconnect the power before installation.

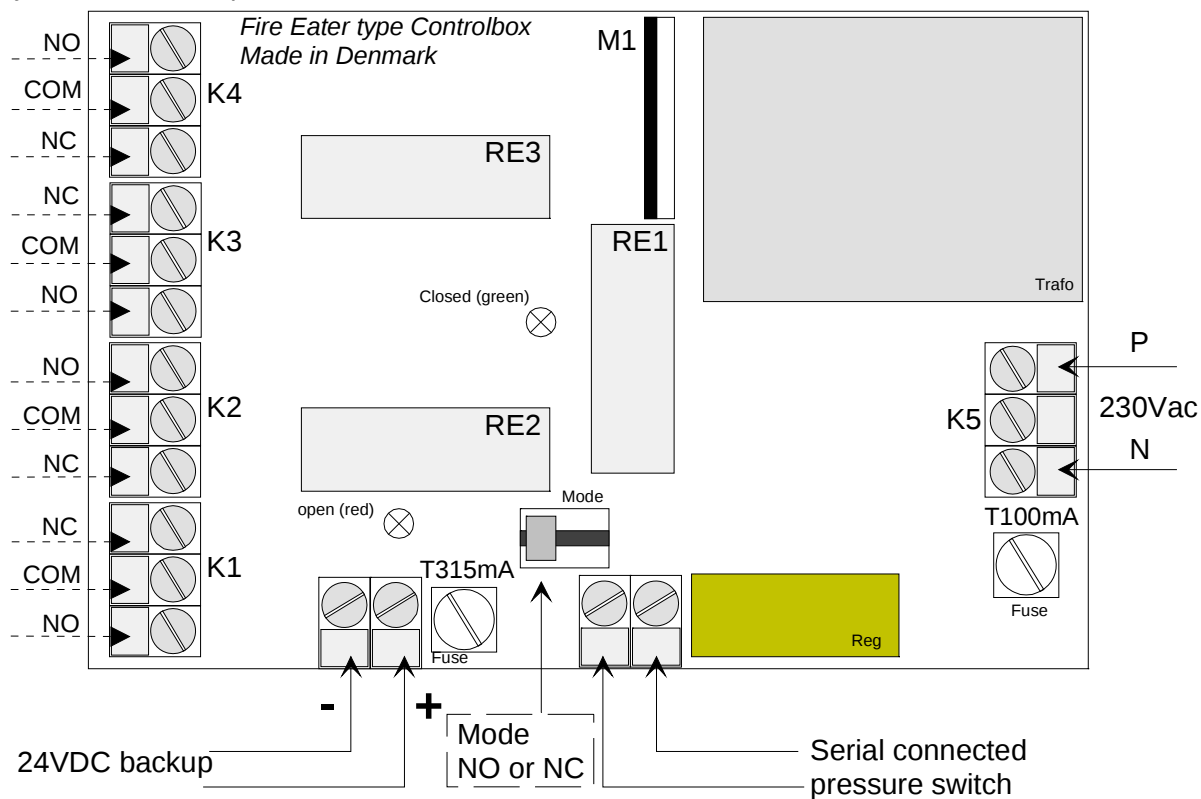

Document: 52623# LFE
controlpanel.doc

Product:

LFE Control unit

Id: KP

Rev: 23.05.08



FIRE EATER 1/2

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Text

1

2

3

4

5

6

7

8

9