

MTL7728ac Zenerbarriers

Description

The MTL7728ac is a one-channel device (shunt-diode safety barriers) for use with conventional polarised sounders/flash located in hazardous areas.

In operation, the triggering of a device causes a corresponding change in the hazardous-area circuit.

Specification

Number of channels:	1
Loop Safety description:	Uo: 28V, Io: 93mA; Um: 250V ac/dc
Weight:	140g approx.
Mounting and Earthing:	By 35mm Top Hat DIN rail.
Ambient temperature:	-20°C to + 60°C

Standard



EN50014
EN50020

Approvals

[EEx ia] IIC
[EEx ia] IIB

Certificate No.

BAS01ATEX7217

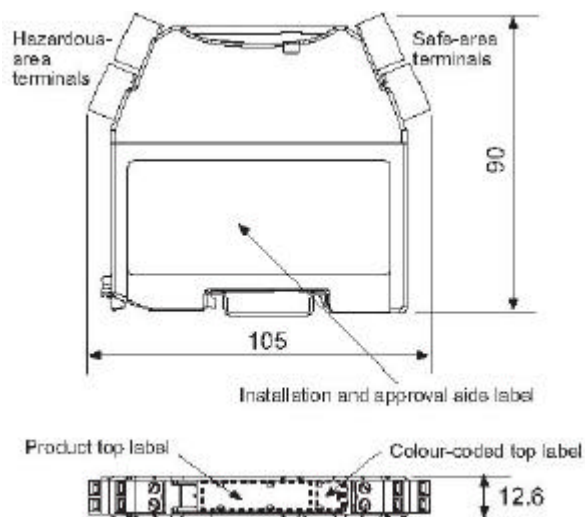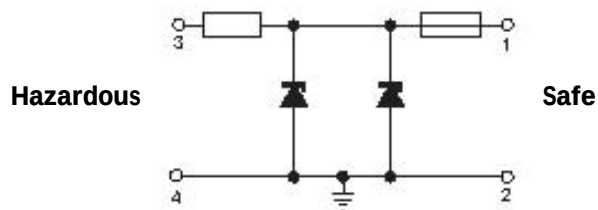

Document: 540330 Zenerbarrier
MTL7728ac.doc

Product:

Electronic acc.

Id: KP

Rev: 10.01.07



FIRE EATER 1/2

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Text

1

2

3

4

5

6

7

8

9