Alarm call point WCP1A-R 470SG

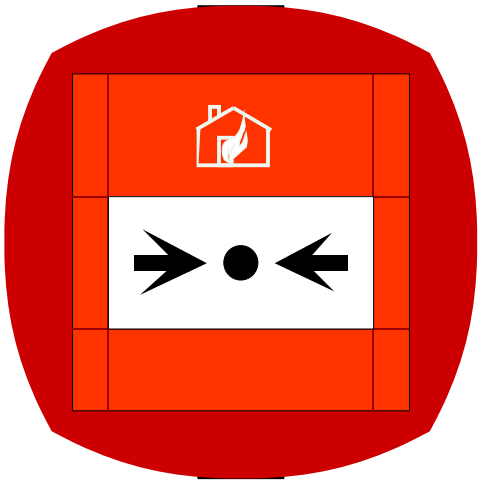

General

The call point is a two single pole normal open contact model with resistor of the break glass type.

Specifications

Designation:	Call point WCP1A-R 470SG
Temp. (operating):	-10 °C to +55 °C
Ingress Protection:	IP67
Colour:	Red
Rated Voltage:	9-30VDC
Rated Current:	2A
Cable limitation:	0.5 – 2.5 mm^2
Resistor:	470 Ω

Dimensions

H×L×D:	125×125×60 mm
Weight:	0.350 Kg
Cable gland connection:	M20

Standard

EN54-11



Approval

LPCB166b/51

Material

PC/ABS

Accessories

702474	Cable gland M20 ø10-14 IP68
540320	Cable gland M20 ø7-12 IP67

Maintenance

After activation the glass element has to be replaced.

FIRE EATER

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

	Text
1	
2	
3	
4	
5	
6	
7	
8	
9	