


### Sockets & Unions for INERGEN distribution

**Item numbers covered by this datasheet**

- 70270404 Galv Socket 270 DN15
- 70270405 Galv Socket 270 DN20
- 70270406 Galv Socket 270 DN25
- 70270407 Galv Socket 270 DN32
- 70270408 Galv Socket 270 DN40
- 70270409 Galv Socket 270 DN50
  
- 70341404 Galv Union 341 DN15
- 70341406 Galv Union 341 DN20
- 70341408 Galv Union 341 DN25
- 70341410 Galv Union 341 D32
- 70341411 Galv Union 341 DN40
- 70341412 Galv Union 341 DN50

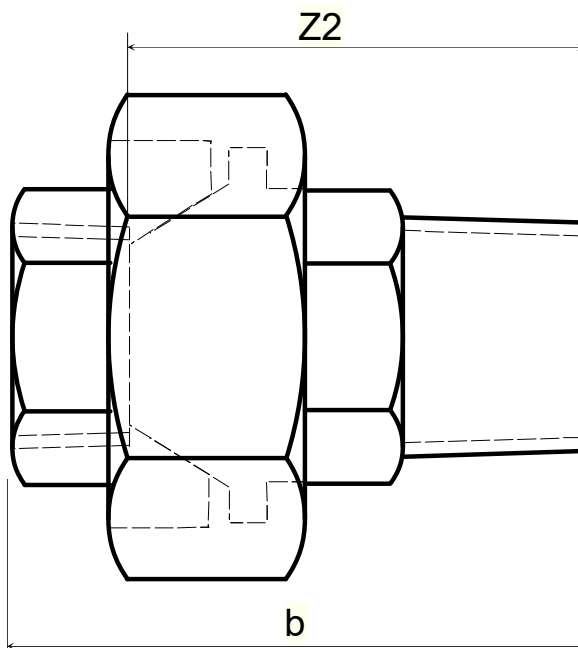

**General**

Galvanised type tested threaded malleable cast iron fittings for use in high-pressure fire extinguishing systems according to Vds rules.

Each dimension has been type tested @ 300bar, each individual fitting has been leak tested to verify its tightness.

**Specifications**

Socket:	b: [mm]	Z(2): [mm]	s: [mm]	Mass: [kg]	Thread: [ISO7/1]
DN15	36	10		0.10	1/2"
DN20	39	9		0.10	3/4"
DN25	45	11		0.15	1"
DN32	50	12		0.20	1 1/4"
DN40	55	17		0.30	1 1/2"
DN50	65	17		0.50	2"

**Union:**

DN15	66	53	38	0.20	1/2"
DN20	72	57	48	0.35	3/4"
DN25	80	63	53	0.45	1"
DN32	90	71	68	0.70	1 1/4"
DN40	95	76	73	0.90	1 1/2"
DN50	106	82	88	1.30	2"

Document: Ci Galv Sockets and Unions.docx

Category: Control inert

Id: MRP  
Rev: 2024-05-



**FIRE EATER** %s

Vølundsvej 17  
DK- 3400 Hillerød  
Tel +45 7022 2769  
Fax +45 7023 2769

Text

1	
2	
3	
4	
5	
6	
7	
8	
9	

**Installation**

See data sheet: 51 Pipes - Pipes regarding details for pipe system and installation.

**Marking**

Each fitting is marked with a Red dot and the letter “D” stamped into the body.

**Standards & approvals**

Fittings are rated for working pressure up to 80bar\* in extinguishing systems and 2.2 certificates are available.

EN 10242, EN10226, EN1562

\* The manufacturer may specify higher working pressure.

<b>Document:</b> Ci Galv Sockets and Unions.docx		1	Text
		2	
<b>Category:</b>	Id: MRP	3	
Control inert	Rev: 2024-05-	4	
		5	
		6	
		7	
		8	
		9	



Vølundsvej 17  
 DK- 3400 Hillerød  
 Tel +45 7022 2769  
 Fax +45 7023 2769