

Discharge call point IP67

This datasheet covers the following items:

- 407136 Discharge call point IP67 without lid. Only pictogram (470 Ω)
 407220 Discharge call point IP67 with lid. Only pictogram (470 Ω)



The discharge call point is a dual single pole normally open contact model with resistor of the break glass type.

The outdoor WCP is an IP67 sealed manual call point product. The enhanced environmental protection allows the unit to be installed in many external environments where water and dirt are likely to be present, making it a true waterproof and outdoor product.

It is also available for installation in hazardous areas, according to ATEX Directive 94/9/EC.

Specifications

Designation:	Discharge call point WCP1A-Y470SG-K013-11IS
Temp. (operating):	-25 °C to +70 °C.
Ingress Protection:	IP67
Colour:	Yellow
Rated Voltage/Current:	9-30VDC/2A
Cable limitation:	0.5 - 2.5 mm ²
Resistor:	470 Ω
H×L×D:	93×98×71 mm
Weight:	350 g
Cable gland connection:	M20
Materials:	PC/ABS

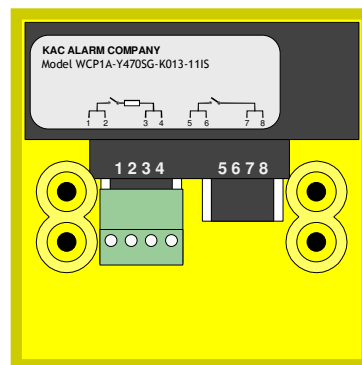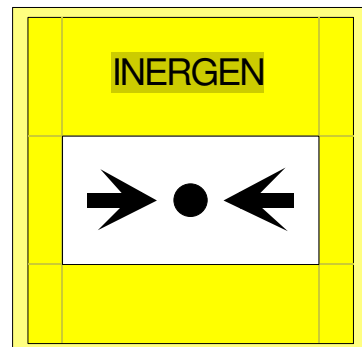

Standard/Approval

EN54-11

LPCB 166b

Certificate number: Sira 06ATEX2131X

Certifications details:


II 1GD Ex ia IIC T4 Ga	(-30 °C to +70 °C)
Ex iaD T135 °C Da	(-20 °C to +40 °C) when Pi = 0.75W
	(-20 °C to +70 °C) when Pi = 0.65W


Accessories

- 407302 Glass "Break glass" EN54 (pict)
 702474 Cable gland M20 \varnothing 10-14 IP68
 540320 Cable gland M20 \varnothing 7-12 IP67

Maintenance

After activation the glass element has to be replaced.

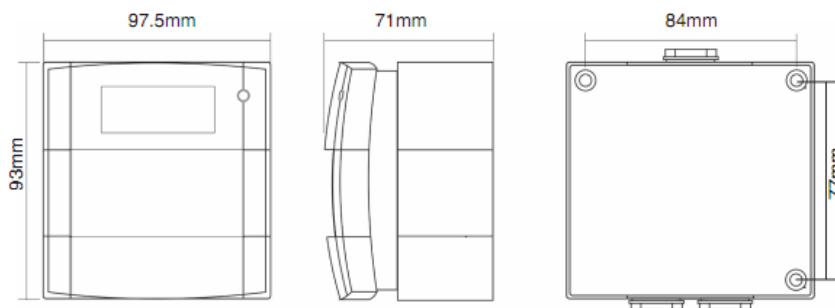

Document:		Text
Discharge call point IP67.doc		1
		2
Chapters:	Id:	3
Accessories	Rev: 12.08.13	4
		5
 <p>Vølundsvej 17 DK- 3400 Hillerød Tel +45 7022 2769 Fax +45 7023 2769</p>		6
		7
		8
		9