

Metron actuator unit**Material**



Housing: Black POM
Internal: Brass

Specifications

Connecting tread: M16 × 0.75
Electrical connection: DIN 43650 B
Work temperature: -30 - + 70°C
Less than 20 hours before discharge
-40 - +100 °C
Life time: 5 years
Classification: UN Class 1
(Non Explosive)
Reliability at 95% confidence level:
0.999

Electrical characteristics

Nominal fire energy 6 mJ
Resistance 0.9 - 1.6 Ω
Max. No fire current:
30 sec. pulse 0.15 A
0.05 sec pulse 0.30 A
Min. single fire current:
DC 0.60 A
0.01 sec. pulse 0.90 A
Recommended fire current
Single 1.00 A
Series 3.00 A
Max monitoring current: 0.01 A

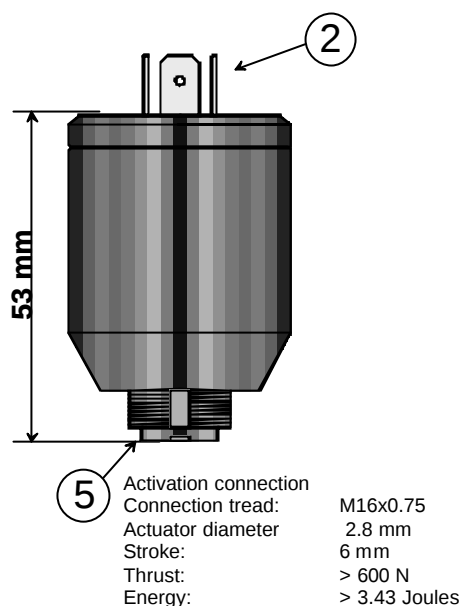

Document: 212131 EA-INERGEN Metron
act. enhed.doc

Product:

Metron actuator

Id: BH

Rev: 21.05.08



FIRE EATER A/S

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Text

1

2

Electrical connection

3

4

5

Activation connection

6

7

8

9