

## EA Metron discharge cable

### General

Cable is used for connecting the metron to the discharge box or directly to the control panel

### Specifications

Integrity:	IP67 (when installed)
Cable length:	2 m
Temp. (operating):	-40 to +70 °C.
Class:	Cable IEC331 (Function Safe)
Connector standard:	DIN43650

### Dimensions

Weight:	0.1 kg
---------	--------

### Material

PVC Free  
Rohs compliant

### Installation

On the metron


Place the gasket on the metron, Push on the plug and tighten the screw.

In discharge box

The actuator is not polarized and either of the leads may be connected to + and or -  
The Yellow&Green wire must be connected to earth.

### Maintenance

Inspect for wear & damages.

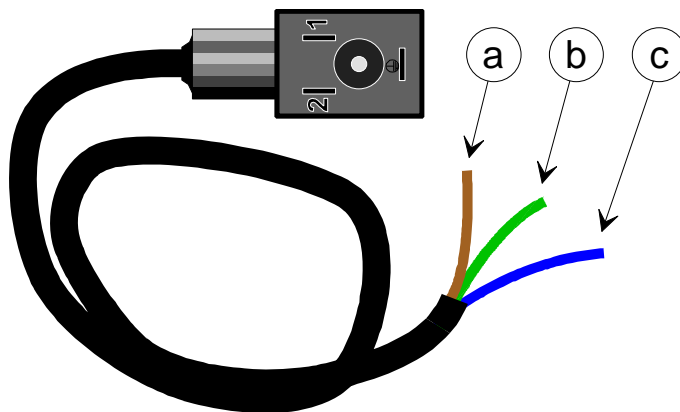

Document: 404024 EA Metron discharge  
cable 2m.doc

Product:

Mech Acc

Id: 10

Rev: 23.10.07



**FIRE EATER** 1/2

Vølundsvej 17  
DK- 3400 Hillerød  
Tel +45 7022 2769  
Fax +45 7023 2769

Text

1

2

3

4

5

6

7

8

9