


Galv Plug for INERGEN piping system.

Item numbers covered by this datasheet.

70290404	Galv Plug beaded 290 DN15
70290405	Galv Plug beaded 290 DN20
70290406	Galv Plug beaded 290 DN25
70290407	Galv Plug beaded 290 DN32
70290408	Galv Plug beaded 290 DN40
70290409	Galv Plug beaded 290 DN50

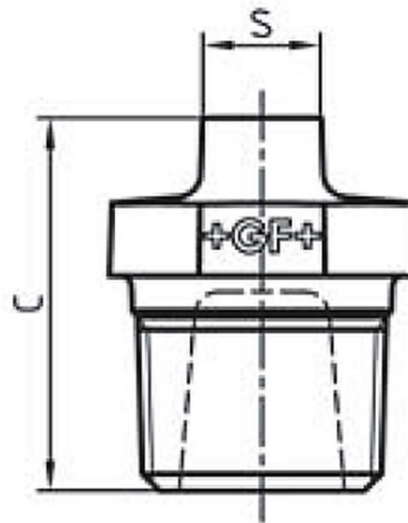

General

Galvanized type tested threaded malleable cast iron plugs for use in high-pressure fire extinguishing systems according to Vds rules. Each dimension has been type tested @ 300bar, each individual fitting has been leak tested to verify its tightness.

Specifications

Pipe:	C:	S:	Thread:
	[mm]	[mm]	[ISO7/1]
70290404	32	11	1/2"
70290405	37	17	3/4"
70290406	41	19	1"
70290407	47	22	1 1/4"
70290408	47	22	1 1/2"
70290409	54	27	2"

Installation

See data sheet: 51 Pipes - Pipes regarding details for pipe system and installation.

Marking

Each fitting is marked with a red dot and the letter "D" stamped into the body.

Standards & approvals

Fittings are rated for working pressure up to 8MPa (80Bar)* in extinguishing systems and 2.2 certificates are available.

EN10242, EN10226, EN1562

* The manufacturer may specify higher working pressure.

Document: ci galv plug.docx		1	Text
		2	
Category: Control inert	Id: MRP	3	
	Rev:2024-05-01	4	
		5	
		6	
		7	
		8	
		9	



Vølundsvej 17
 DK- 3400 Hillerød
 Tel +45 7022 2769
 Fax +45 7023 2769