


IV7 PA inlet adaptor

303126 IV7 PA inlet adaptor

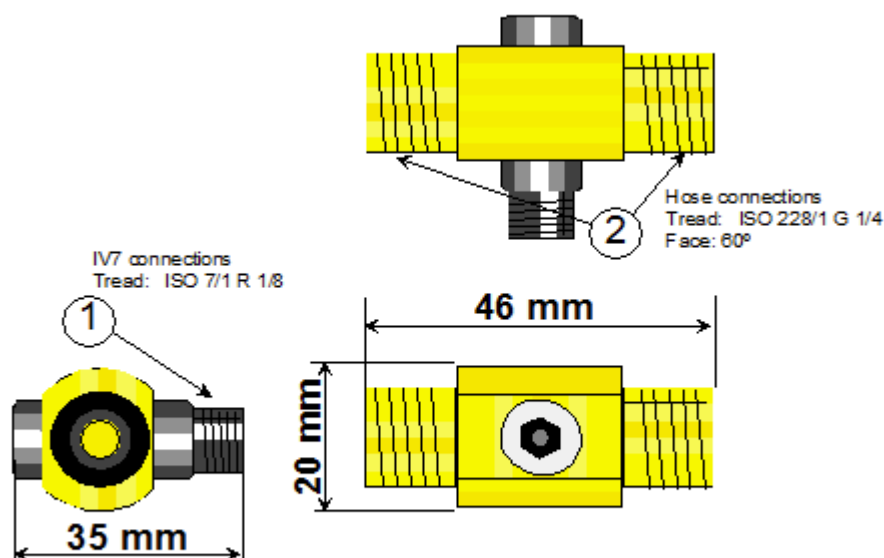

The inlet adaptor is used for connecting hoses for Pneumatic Activation (PA) on Control Inert systems.

Specifications

Designation: PA inlet adaptor
Temp. (operating): -40 to +70 °C.
Materials: Brass / AISI316 / EPDM
Dimensions: $\varnothing 20 \times 46 \times 35$ mm
Weight: 0.067 kg
Max. work Pressure [MPa]: 40 MPa

Thread connections: 2x ISO228 G1/4" 1x ISO 7/1 R1/8"

Installation

The fitting may be positioned freely, Thread sealant (PTFE Tape, or liquid sealant) must be applied to 1/8" tapered thread. On 1/4" thread no sealant is to be applied as it could impair function.

All connections are to be tightened as per ISO7 and ISO228. Good workman practice should be used.

Replaceable parts

Item should not be dismantled, no replaceable parts.

Document:		Text
303126 IV7 PA inlet adaptor		1
		2
Category:	Id: SOJE	3
	Rev:2024.12.05	4
Control inert		5
		6
		7
		8
		9