


SV-Ci start kit (incl IV8)

General

A kit containing components for installation of one selector valve (SV22) controlled by one pilot valve. Connections to SV22 and pilot cylinders are made with $\varnothing 6\text{mm}$ stainless steel tube.

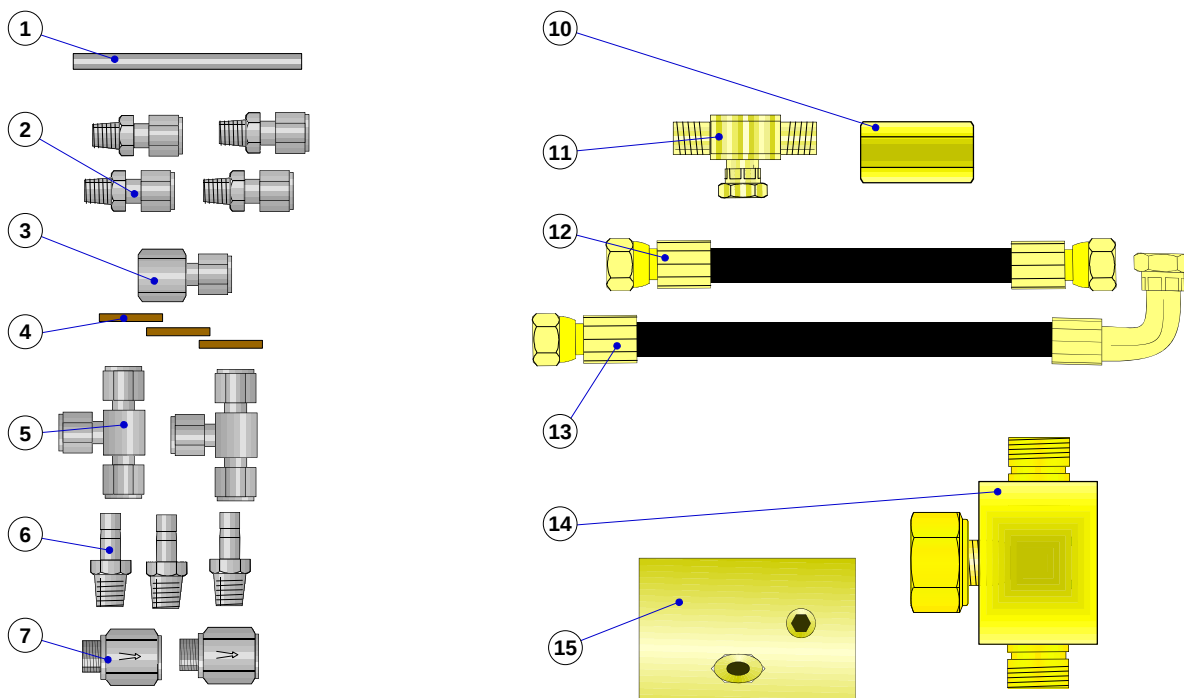

Components

Pos.	Name	Quantity	Item
1:	Tube $\varnothing 6\text{mm}$	Not included	102012
2:	Compression fitting 1/8" BSPT - $\varnothing 6$	4	214058
3:	Compression fitting 1/4" BSP (F) $\varnothing 6$	1	301382
4:	Bonded seal 1/4"	3	777003
5:	Compression fitting Tee $\varnothing 6$	2	214035
6:	Compression fitting 1/4" BSPT- $\varnothing 6$ Stud	3	214301
7:	Non-Return valve 1/4"	2	305302
10:	Bleed fitting 400bar	1	305320
11:	Tee 1/4" BSP (In-Union-In)	1	303281
12:	Pressure Hose 1/4"-400 0.400m	1	205064
13:	Pressure Hose 1/4"-400 180+90° 0.400m	1	303184
14:	DV7a -2 M25 (300bar)	1	304042
15:	Ci IV8-300 Basic	1	305411

Document: 305198 SV-Ci startkit incl
IV8.doc

Product:

Inergen®

Id: MK

Rev: 12.11.08



FIRE EATER 1/2

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Text

1

2

3

4

5

6

7

8

9





Installation

Position numbers on the drawings refer to position numbers on the previous page.

All connections are to be tightened.

The tube connection between the pilot valve IV8 (#15) and the discharge valve IV8 should be routed so that it is possible to reset the discharge valve IV8 without removing the tube.

For a dual actuator system;
add one additional Ci-IV8 Basic [305411]
and one additional Dv7a-2 M25 (300 bar) [304042].

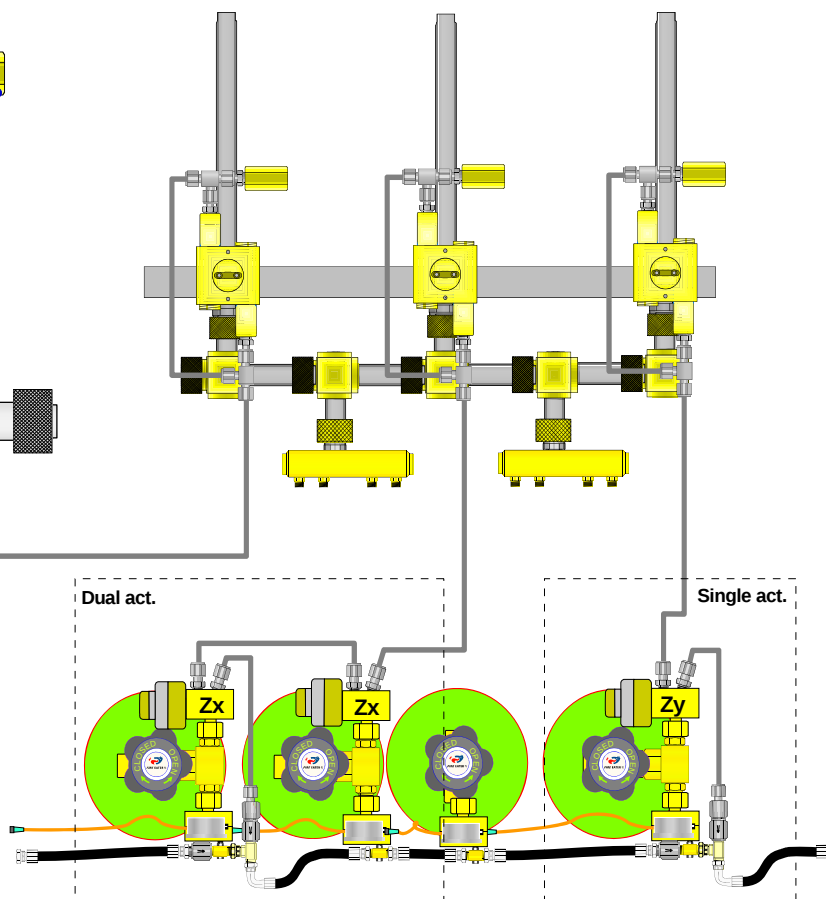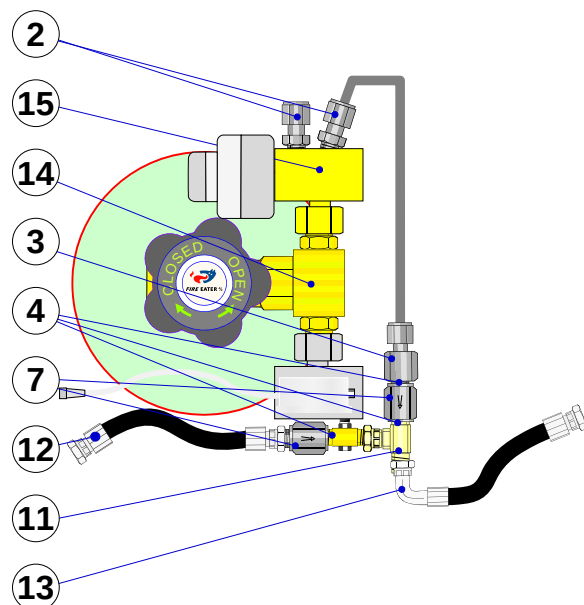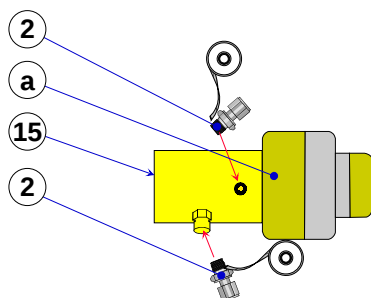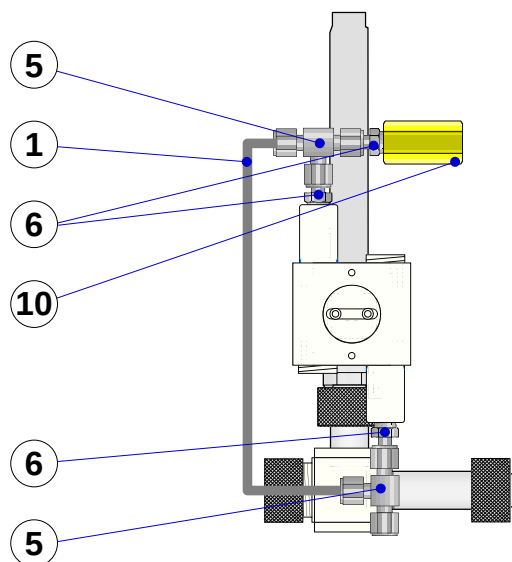

Document: 305198 SV-Ci startkit incl
IV8.doc

Product:

Inergen®

Id: MK

Rev: 12.11.08



FIRE EATER 1/2

Vølundsvej 17
DK- 3400 Hillerød
Tel +45 7022 2769
Fax +45 7023 2769

Text

1	
2	
3	
4	
5	
6	
7	
8	
9	